

## DETAIL SHEET

## SMART STEEL CRASH CUSHION

### VicRoads Requirements

Refer to Austroads - Safety Barrier System Acceptance Conditions for the SMART Steel Crash Cushion. All requirements listed by Austroads have been adopted by VicRoads for use on the Victorian declared road network.

In this instance, VicRoads applies additional requirements/conditions for use of SMART Steel Crash Cushion on the Victorian declared road network including:

- The crash cushion is to be fitted with a plastic motorcycle friendly cover that fits over the impact head and must include a white and black retro-reflective hazard marker.

Please Note: VicRoads requirements take precedence over any Product Manual instructions and Austroads conditions where conflicting.

### References

- Product Installation Manual and Product Operational Manual [refer licensed product supplier website](#)
- VicRoads Road Design Note 06-04 Accepted Safety Barrier Products



### For further information please contact:

VicRoads Technical Services  
60 Denmark Street  
Kew, Vic, 3101  
Telephone: 8391 7192

**Accepted safety barrier products are subject to periodic review and the information provided in this document may be superseded. Please refer to Road Design Note 06-04 – Accepted Safety Barrier products for the current VicRoads acceptance status.**

# Safety Barrier System Acceptance Conditions

## SMART Steel Crash Cushion

	<b>Proponent</b>	LB Australia
	<b>Proponent email</b>	roadsafety@lbaustralia.com.au
	<b>Date Issued</b>	30 June 2014





<b>Status</b>	<b>Accepted</b> – May be used on the classified road network.
<b>Variants accepted</b>	<ul style="list-style-type: none"> <li>• SCI100GM SMART Steel Crash Cushion.</li> <li>• SCI70GM SMART Steel Crash Cushion.</li> <li>• Transitions to single slope and Type F concrete safety barriers.</li> </ul>
<b>Variants NOT accepted</b>	<ul style="list-style-type: none"> <li>• Transitions to W-beam.</li> <li>• Variants that are not on the list above are not accepted.</li> <li>• Variants accepted in other jurisdictions, but not accepted in the local jurisdiction, are NOT permitted.</li> </ul>

<b>Speed limit (km/h)</b>	100km/h (SCI100GM). 70 km/h (SCI70GM). Permanent barriers accepted for 100km/h may be used in 110 km/h speed zones.
<b>Tested containment (kg)</b>	2,000 kg at 100 km/h and 0° (SCI100GM). 2,000 kg at 70 km/h and 0° (SCI70GM).
<b>Adopted dynamic deflection (Nominal 2 tonne vehicle)</b>	Not applicable.
<b>Point of need</b>	Not applicable.
<b>Development length</b>	Not applicable.
<b>Minimum length of barrier between terminals</b>	Not Applicable.
<b>System width (m)</b>	0.96 metres (SCI100GM). 0.88 metres (SCI70GM).

<b>System conditions</b>	Not specified.
<b>Terminal conditions</b>	<ol style="list-style-type: none"> <li>1. Installation on top of a kerb is not recommended, however if installed on top of a kerb, all system components must be free to operate.</li> <li>2. Refer to Product Manual for installation advice adjacent to elevated kerbs.</li> </ol>
<b>Gore area use</b>	Permitted.
<b>Pedestrian area use</b>	Permitted – consider potential for snagging and deflection.
<b>Cycleway use</b>	Permitted – consider potential for snagging and deflection.
<b>Frequent impact likely</b>	Permitted.
<b>Remote location</b>	Permitted.
<b>Median use</b>	Permitted.
<b>Minimum median width (m)</b>	Not specified.

<b>Flare rate</b> (See Explanation of Terms diagram)	Not applicable.	
<b>Offset to travel lane (m)</b>	Refer to Austroads Guide to Road Design Part 6: Roadside Design, Safety and Barriers, Section 6.3.5.	
<b>Hazard free area beside barrier or terminal</b> (Working Width)	Refer to Austroads Guide to Road Design Part 6: Roadside Design, Safety and Barriers, Section 6.3.16.	
<b>Installation</b>	The SMART Steel Crash Cushion must be installed and maintained in accordance with the Product Manual and road authority specifications. The road authority specifications and standards shall have precedence.	
<b>Minimum distance to excavation</b>	<p>Minimum distance between the edge of the barrier and the edge of an excavation:</p> <ul style="list-style-type: none"> <li>• 0.2 metres when anchored on concrete pavement.</li> <li>• 0.6 metres when anchored on flexible pavement.</li> </ul> <p>(Being the greater of the largest adopted dynamic deflection or 1.5 times the embedment depth of the anchor).</p>	
<b>Slope limit</b>	<p>Side slope limit: 10 Horizontal to 1 Vertical (10%).</p> <p>Longitudinal slope limit: 10 Horizontal to 1 Vertical (10%).</p>	
<b>Foundation pavement conditions</b>	Concrete	Permitted.
	Deep lift Asphaltic Concrete	Permitted with concrete pad (permanent). Permitted pinned to asphalt (temporary).
	Asphaltic concrete over granular pavement	Permitted with concrete pad (permanent). Permitted pinned to asphalt (temporary).
	Flush seal over granular pavement	Permitted with concrete pad.
	Unsealed compacted formation	Not Permitted.
	Natural surface	Not Permitted.
	Foundation pavement conditions must be smooth and free of snag points, kerbs or obstructions that may interfere with deflection of the barrier.	
<b>Attachments and screens</b>	<p>Visual screens, debris screens, platforms for workers and other non-product hardware must not be attached to the product.</p> <p>Screens may be placed adjacent to the side of the product not exposed to traffic. The distance between the screen and the product shall be determined by a site specific risk assessment that considers the deflection distance.</p> <p>Screens must not have horizontal members that present a risk of impaling errant vehicles that impact the product.</p>	
<b>Damaged components</b>	Damaged components must be replaced. Repaired components must not be used.	
<b>Delineation</b>	The installed system shall include delineation as prescribed by road authority specifications and drawings.	
<b>Traceability and markings</b>	<p>Product markings shall be in accordance with marking/s prescribed by the current Australian/New Zealand Standard "AS/NZS 3845 Road Safety Barrier Systems" and road authority specifications. Traceability details that must be permanently fixed to the product are:</p> <ul style="list-style-type: none"> <li>• Name of the product.</li> <li>• Model or version details of the product, if applicable.</li> <li>• Manufacturer or distributor name.</li> <li>• Batch number, if applicable.</li> <li>• Serial number, if applicable.</li> </ul>	

	<ul style="list-style-type: none"> <li>• Date of manufacture.</li> </ul> <p>Traceability details must easily visible but unobtrusive and not be in a form that becomes prominent advertising. No advertising shall be displayed on the installation.</p> <p>Traceability must be in a form that will not be erased with use.</p>
<p><b>Notes</b></p>	<p>Acceptance is based on drawings in the Product Manual supplied by the Proponent, dated July 2012. This acceptance will cease if there is any change in the product design or specifications.</p> <p>Only the Product Manual prepared by the Proponent shall be used in any marketing of the product.</p> <p>Acceptance of the SMART Steel Crash Cushion does not place any obligation on the road authority, or its contractors, to purchase or use the product.</p> <p>The Austroads Safety Barrier Assessment Panel may periodically re-assess the SMART Steel Crash Cushion.</p> <p>The road authority may withdraw or modify at any time, the acceptance status or conditions of use of the product without notice. Users should refer to the road authority web site to ensure they have the latest version of the conditions related to this product.</p>

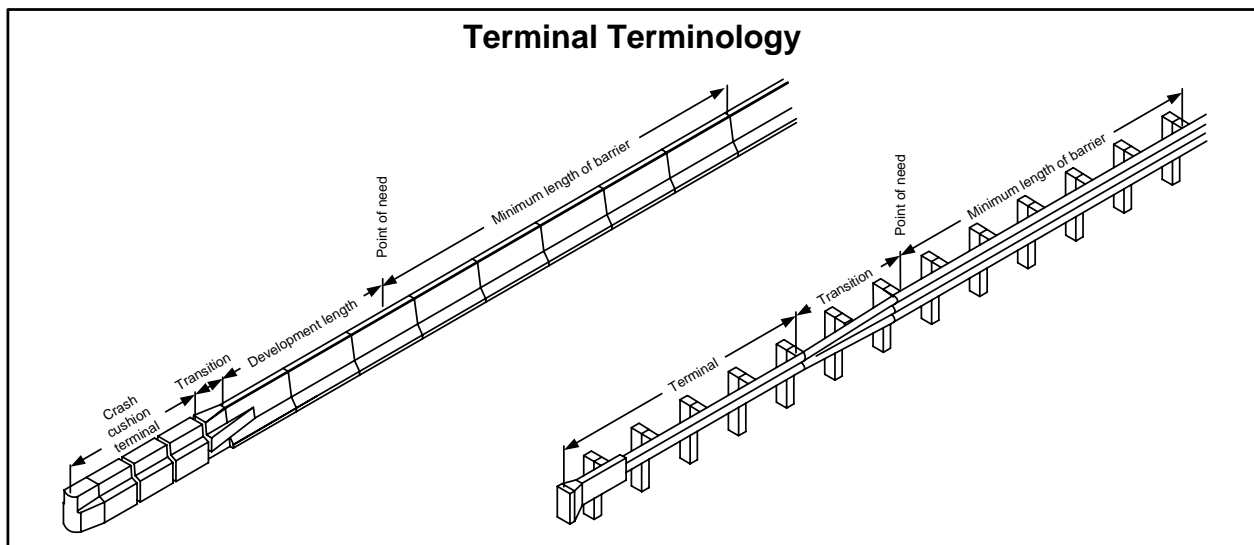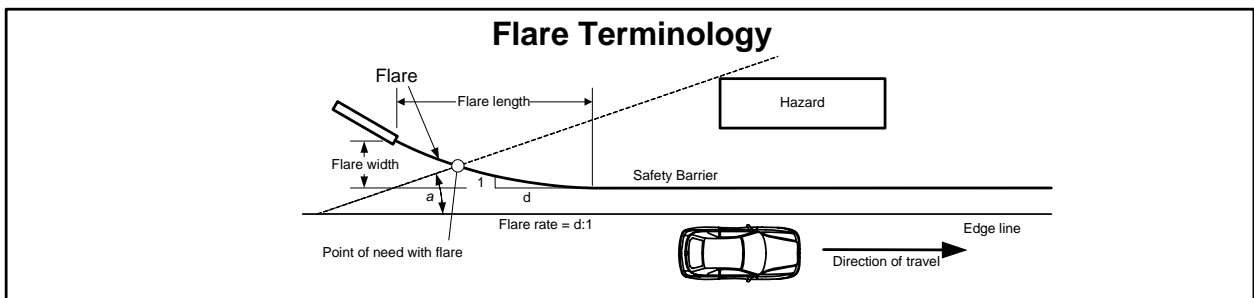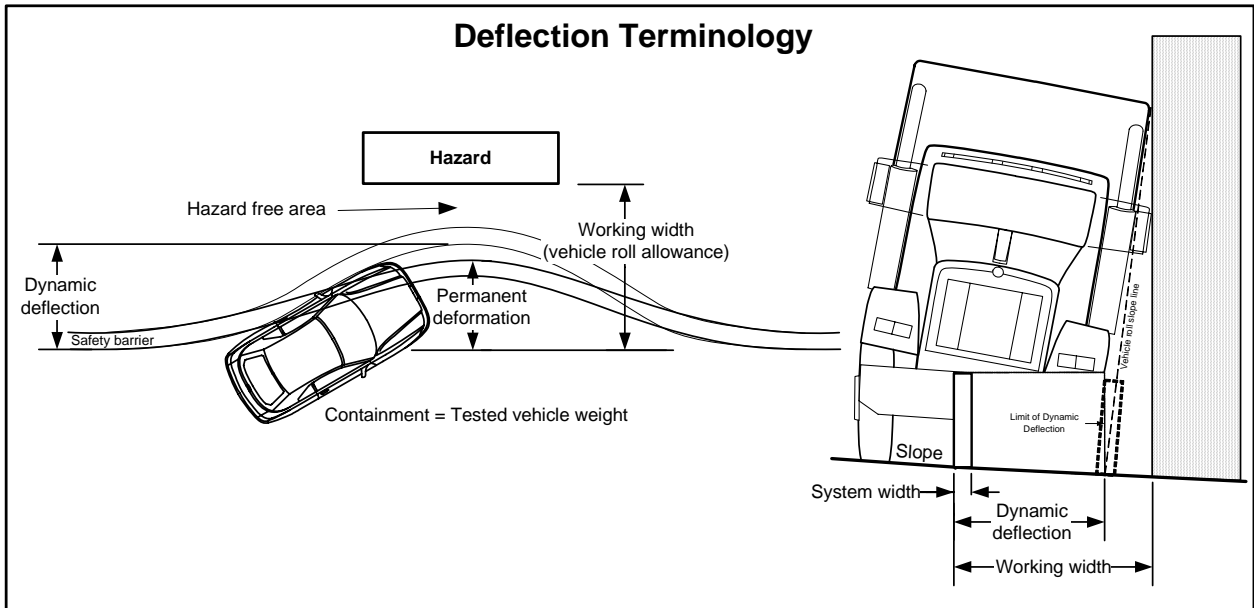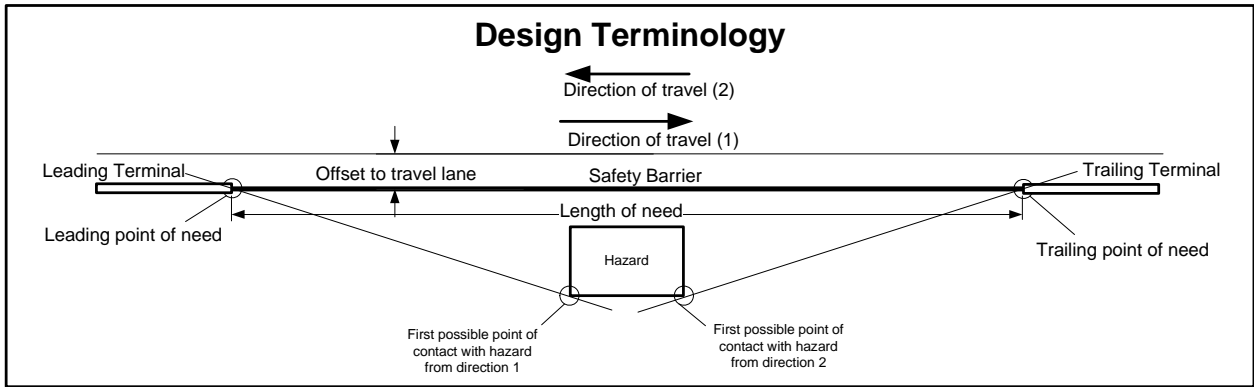

Safety Barrier terminology.vsd

For more information, refer to  
 Austroads Guide to Road Design Part 6: Roadside Design, Safety and Barriers